


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.50V I:0.0129A P:2.8552W PF:0.9593 Freq:50.00Hz Lamp Flux:457.3x1 lm		
NAME: SUDO MINI - BEAM FRAME	TYPE:PATH FINDERS	WEIGHT:0.6Kg
SPEC.:WW, NICHIA	DIM.: 76 x 87 x 130	SERIAL No.:2501
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 13.18 lm/W
MODEL	KL-2759	I _{max} (cd)	302.4	S/MH (C0/180)	0.00	
NOMINAL POWER (W)	3	LOR (%)	8.2	S/MH (C90/270)	0.00	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	37.623	η UP, DN (C0-180)	0.2, 8.0	
NOMINAL FLUX (lm)	457.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.0	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	8.0	CIBSE SHR MAX	1.00	

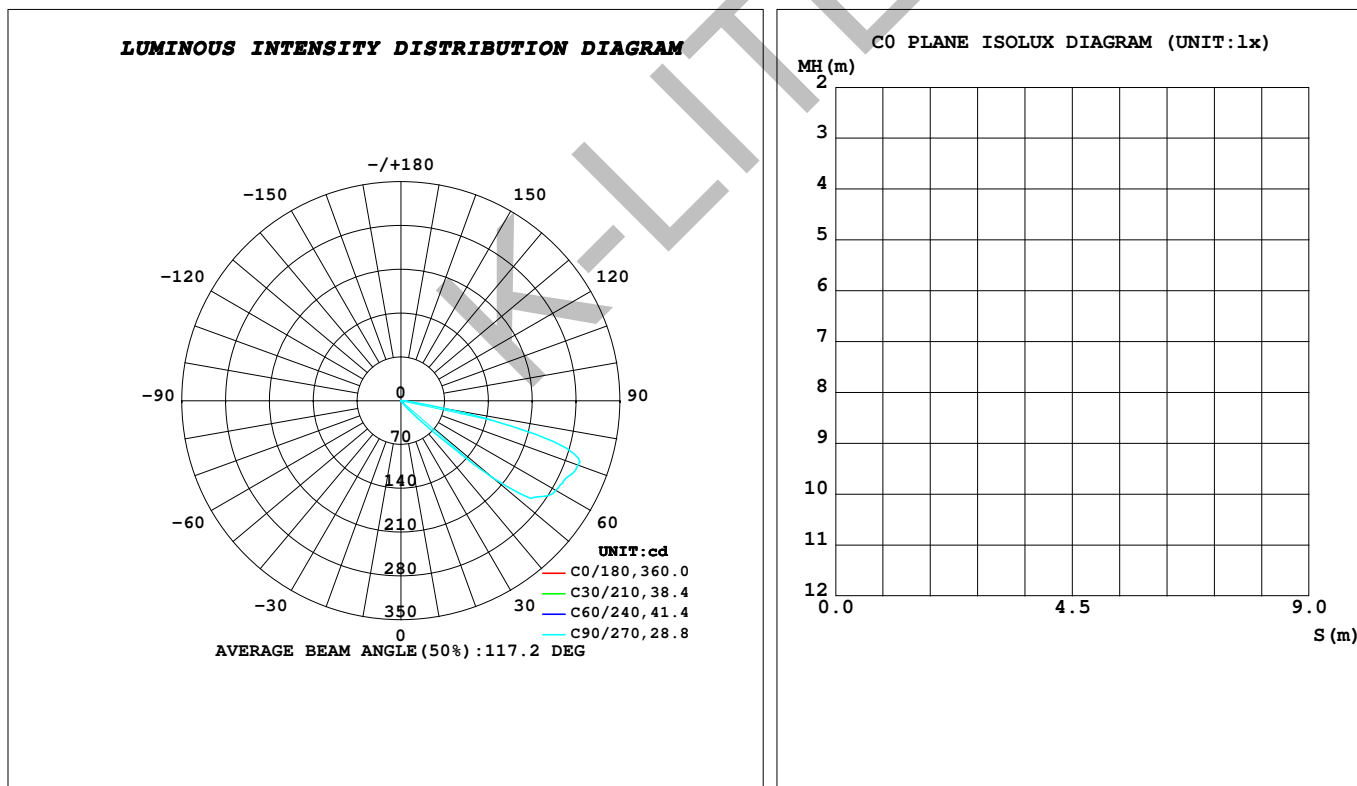

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 15 January 2021

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: