


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.0263A P:5.9371W PF:0.9791 Freq:49.99Hz Lamp Flux:626.22x1 lm		
NAME: SUDO - ASY VERTICAL REEDED FRAME	TYPE:PATH FINDERS	WEIGHT:0.75kg
SPEC.:WW, NICHIA	DIM.: 76 x 90 x 255	SERIAL No.:2144
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 22.17 lm/W
MODEL	KL-2763	I _{max} (cd)	160.1	S/MH (C0/180)	0.00	
NOMINAL POWER (W)	6	LOR (%)	21.0	S/MH (C90/270)	0.00	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	131.65	η UP, DN (C0-180)	0.0, 21.0	
NOMINAL FLUX (lm)	626.22	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	21.0	CIBSE SHR MAX	1.00	

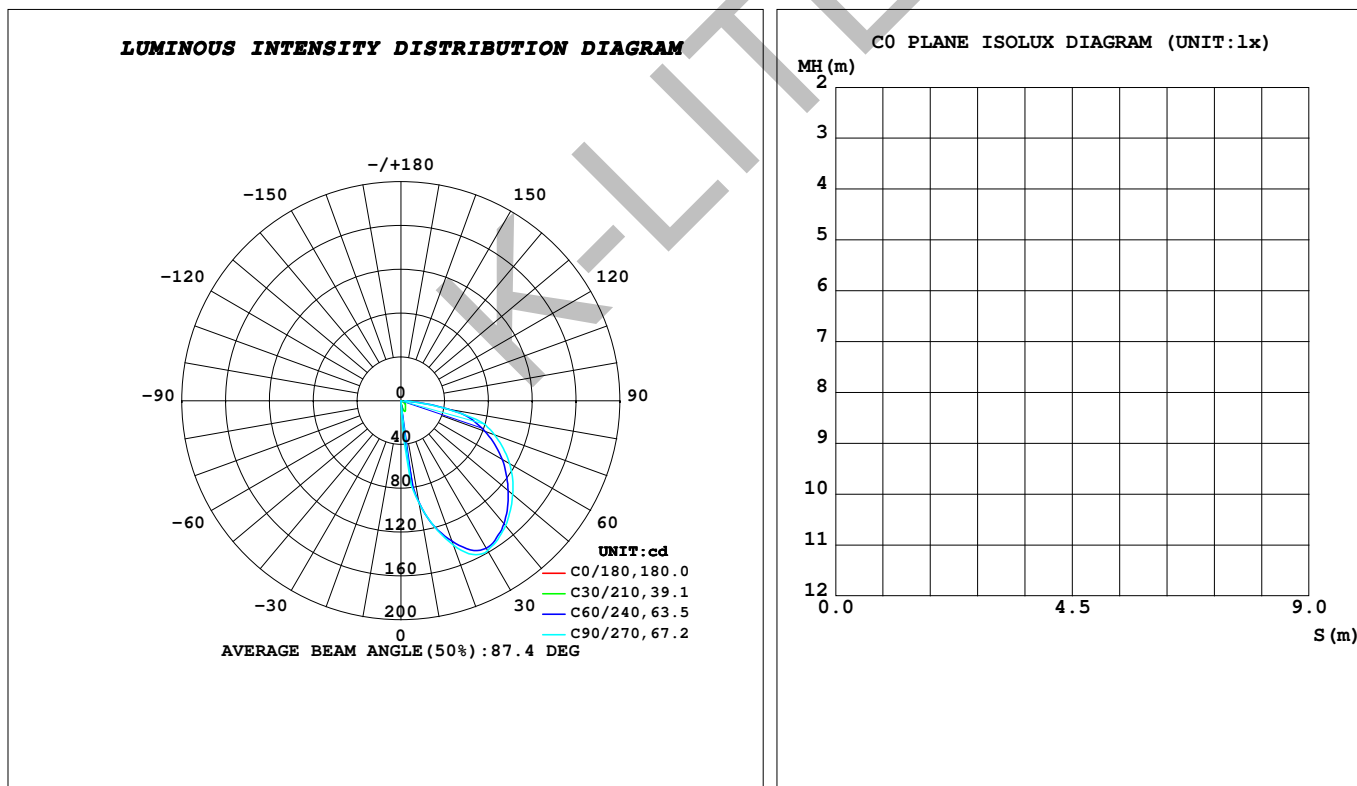

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 20 October 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: