

Linear recess mounted LED luminaires suitable for floor and wall applications which adds elegance to commercial, historical and modern architecture. Three different lengths are provided allowing the luminaire installation to be tailored as per the structure.

Product Description

- Recessed luminaire housing made of extruded aluminium alloy and stainless steel 316 front plate 3mm thickness.
- Safety 6mm thickness toughened glass (Lens).
- Luminaire suitable for walkover applications.
- Luminaire must not be used for installation where the fixture is exposed to a horizontal strain due to braking, acceleration and change of direction.
- Recessed LED luminaires without power supply unit.
- CRI (Ra) : ≥ 80 (90 CRI - On Request)
- Constant voltage non integral power supply
- Recess mounting sleeve made of aluminium profile, powder coated with cable entries for connecting cable up to $\varnothing 12$ mm.
- Low Voltage at 24Vdc assures safety.
- Ordering guide : KL-3278-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K.



Product Benefits

- High luminous efficiency at reduced wattage.
- A sleek and minimalist shape provides distinctive lighting effects for inground and wall architecture.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Areas of Application

Building Facade, Walk ways, Building mounted focal points, Bridges, Landscapes, Architectural elements.

Accessory


- A separate IP67 rated connector supplied for a secure connection.
- Power supply unit of 24V dc required for the luminaire.
- The power supply units are also suitable for the operation of several LED luminaires. In this case total wattage of the LED luminaires must not exceed the wattage of power supply.

Installation

Possible in both horizontal and vertical mounting position.



Luminaire supplied with honeycomb louvre

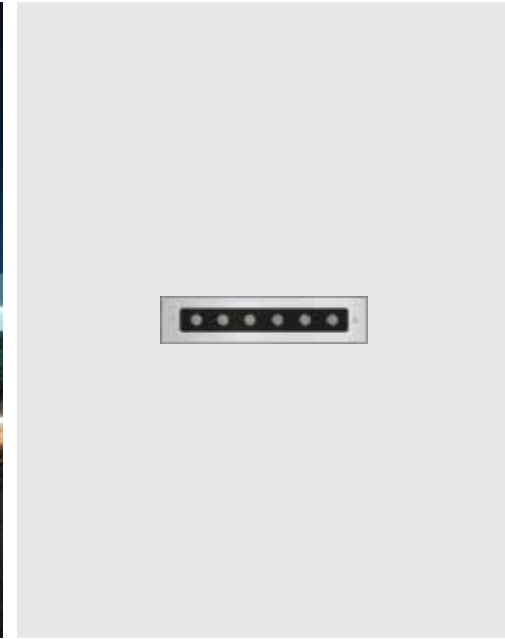

Technical Specifications

General

ID	: 3552 / 3549
System Wattage	: 6W / 12W LED
Driver Non Integral	: Constant Voltage
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Housing	: Extruded Aluminium
Front Cover	: 316 Grade Stainless Steel
Diffuser	: Toughened Clear Glass
Mounting Sleeve	: Recessed Powder Coated Aluminium
COD (mm)	: 300 x 68 x 80

Light Source


Light Source	: NICHIA
CRI (Ra)	: >80 (> 90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K (Special colours on request)

Driver

Power Supply	: 24Vdc Non Integral
Surge Protection	: 3KV
Efficiency	: >80%
Dimmable Option	: 1-10V / Dali

Optical

Beam Angle	: 8° / 28° / 40° / 64° / 12° x 53°
------------	---------------------------------------



Accessory - Optional




Luminaire supplied with honeycomb louvre



ID : 8330 - Longitudinal Louvre

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

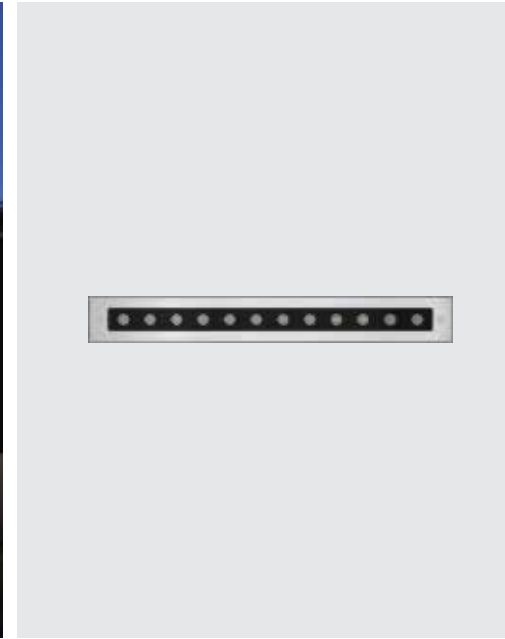

Technical Specifications

General

ID	: 3278 / 3270
System Wattage	: 12W / 24W LED
Driver Non Integral	: Constant Voltage
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Housing	: Extruded Aluminium
Front Cover	: 316 Grade Stainless Steel
Diffuser	: Toughened Clear Glass
Mounting Sleeve	: Recessed Powder Coated Aluminium
COD (mm)	: 540 x 68 x 80

Light Source


Light Source	: NICHIA
CRI (Ra)	: >80 (> 90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: 24Vdc Non Integral
Surge Protection	: 3KV
Efficiency	: >80%
Dimmable Option	: 1-10V / Dali

Optical


Beam Angle	: 8° / 28° / 40° / 64° / 12° x 53°
------------	------------------------------------

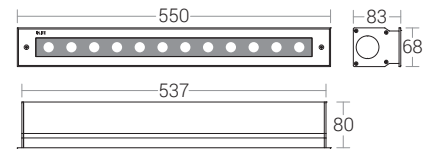

Accessory - Optional



Luminaire supplied with honeycomb louvre



ID : 8330 - Longitudinal Louvre

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



Technical Specifications

General

ID	: 3280 / 3272
System Wattage	: 24W / 48W LED
Driver Non Integral	: Constant Voltage
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Housing	: Extruded Aluminium
Front Cover	: 316 Grade Stainless Steel
Diffuser	: Toughened Clear Glass
Mounting Sleeve	: Recessed Powder Coated Aluminium
COD (mm)	: 1015 x 68 x 80

Light Source


Light Source	: NICHIA
CRI (Ra)	: >80 (> 90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: 24Vdc Non Integral
Surge Protection	: 3KV
Efficiency	: >80%
Dimmable Option	: 1-10V / Dali

Optical


Beam Angle	: 8° / 28° / 40° / 64° / 12° x 53°
------------	------------------------------------

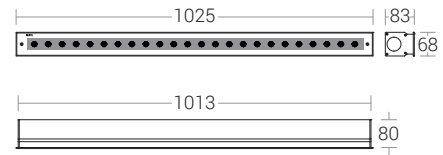

Accessory - Optional



Luminaire supplied with honeycomb louvre



ID : 8330 - Longitudinal Louvre

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in