

Surface mounted range of LED wall lights are a perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered in symmetrical light distribution.

Product Description

- Extruded aluminium hood cover integrated with die-cast module and extruded aluminium alloy (grade 6063) tube.
- Heat resistant polycarbonate optical lens.
- Stainless steel mounting clamp for easy installation onto the wall.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Available in 10°, 28° & 45° beam angles
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4287-CCT (Colour Temperature)
- Available CCT : 2700K, 4000K, 5700K (RGBW On Request)



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application


Pathways in residential buildings & office complex, Sculptures, Passages, Structures and Security lighting.

Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black



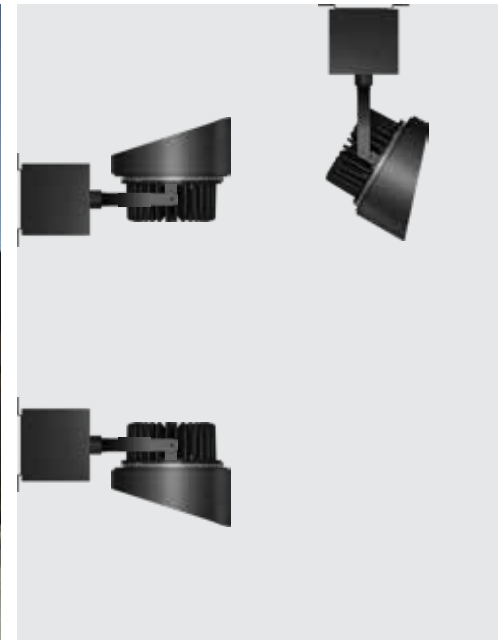

Technical Specifications

General

ID	: 4287
System Wattage	: 30W LED
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Wall
Finish	: Powder Coated Graphite Grey / Jet Black Anthracite Grey

Light Source





Light Source	: NICHIA
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 4000K / 5700K RGBW On Request

Driver

Power Supply	: Integral
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%
Dimmable Option	: Analog / Dali & RGB Controller

Optical Performance

Beam Angle	: 10° / 28° / 45°
------------	-------------------

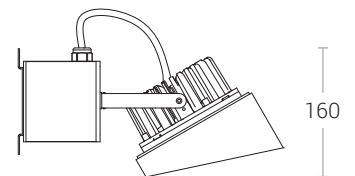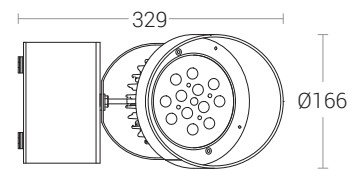

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

Surface mounted range of LED wall lights are a perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered in symmetrical light distribution.

Product Description

- Extruded aluminium hood cover integrated with die-cast module and extruded aluminium alloy (grade 6063) tube.
- Heat resistant polycarbonate optical lens.
- Stainless steel mounting clamp for easy installation onto the wall.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Available in 10°, 28° & 45° beam angles
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4288-CCT (Colour Temperature)
- Available CCT : 2700K, 4000K, 5700K (RGBW On Request)



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application


Pathways in residential buildings & office complex, Sculptures, Passages, Structures and Security lighting.

Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black



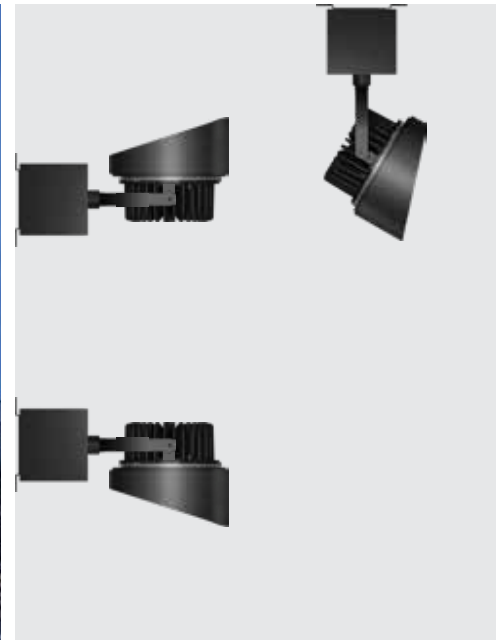

Technical Specifications

General

ID	: 4288
System Wattage	: 50W LED
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Wall
Finish	: Powder Coated Graphite Grey / Jet Black Anthracite Grey

Light Source





Light Source	: NICHIA
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 4000K / 5700K RGBW On Request

Driver

Power Supply	: Integral
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%
Dimmable Option	: Analog / Dali & RGB Controller

Optical Performance

Beam Angle	: 10° / 28° / 45°
------------	-------------------

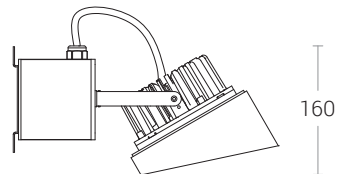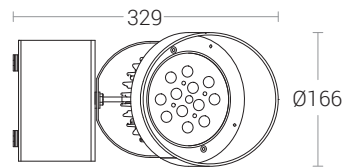

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in