

Surface mounted range of LED wall lights are a perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered in symmetrical light distribution.

### Product Description

- Extruded aluminium hood cover integrated with die-cast module and extruded aluminium alloy (grade 6063) tube.
- Heat resistant polycarbonate optical lens.
- Stainless steel mounting clamp for easy installation onto the wall.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Available in 6° beam angle
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4334-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 5700K (RGBW On Request)



### Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application


Pathways in residential buildings & office complex, Sculptures, Passages, Structures and Security lighting.

### Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black



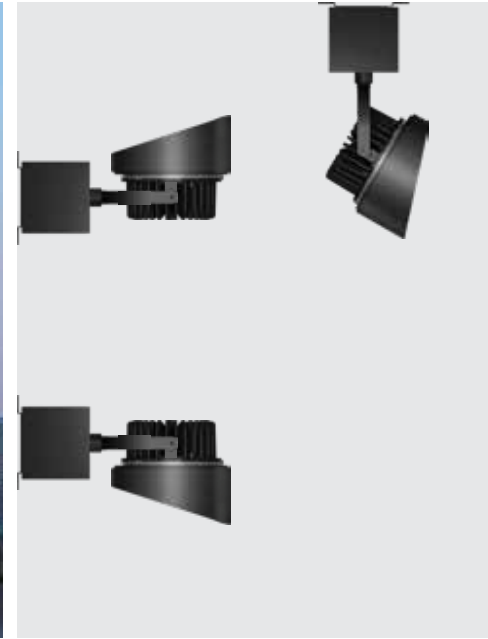

**Technical Specifications**

**General**

ID	: 4334
System Wattage	: 30W LED
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-30Vac
Operating Temperature	: -15°C~+50°C

**Light Source**

Light Source	: LUMILEDS
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K (RGBW On Request)

**Physical**





Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Wall
Finish	: Powder Coated Graphite Grey / Jet Black Anthracite Grey

**Driver**

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%
Dimmable Option	: Analog / Dali

**Optical Performance**

Beam Angle	: 6°
------------	------

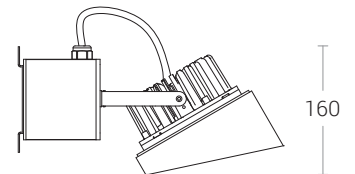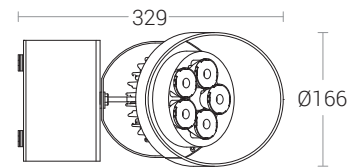

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)

Surface mounted range of LED wall lights are a perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered in symmetrical light distribution.

### Product Description

- Extruded aluminium hood cover integrated with die-cast module and extruded aluminium alloy (grade 6063) tube.
- Heat resistant polycarbonate optical lens.
- Stainless steel mounting clamp for easy installation onto the wall.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Available in 6° beam angle
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4335-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 5700K (RGBW On Request)



### Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application


Pathways in residential buildings & office complex, Sculptures, Passages, Structures and Security lighting.

### Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black



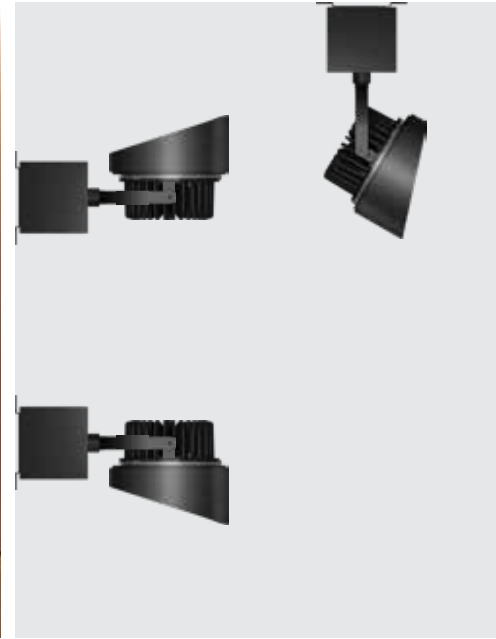

**Technical Specifications**

**General**

ID	: 4335
System Wattage	: 50W LED
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

**Light Source**

Light Source	: LUMILEDS
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K (RGBW On Request)

**Physical**





Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Wall
Finish	: Powder Coated Graphite Grey / Jet Black Anthracite Grey

**Driver**

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%
Dimmable Option	: Analog / Dali

**Optical Performance**

Beam Angle	: 6°
------------	------

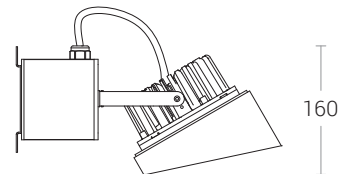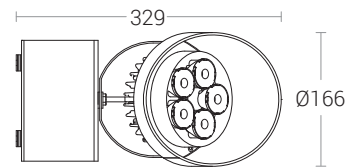

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)