



**Technical Specifications**

**General**

ID : 4427 / 4428  
 System Wattage : 200W / 240W LED  
 Driver Integral : Constant Current  
 Input Voltage : 230-240Vac  
 Frequency : 50-60 Hz  
 Operating Voltage : 100-277Vac  
 Operating Temperature : -15°C~+50°C

**Physical**

Body : Extruded Aluminum  
 Diffuser : Polycarbonate Optical Lens  
 Mounting : Suitable for mounting on  
 91mm Square pipe,  
 88.9mm OD pipe  
 Finish : Powder Coated  
 Graphite Grey / Jet Black  
 Anthracite Grey

**Light Source**


Light Source : LUMILEDS / OSRAM  
 CRI (Ra) : >80  
 LED Colour Temperature : 3000K / 4000K / 5700K

**Driver**

Power Supply : Integral  
 Power Factor : >0.95  
 THD : <10%  
 Surge Protection : 6KV  
 Efficiency : >85%

**Optical Performance**

Light Distribution : Type III

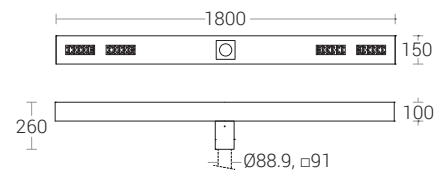

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)