

Surface-mounted range of wall lights are a great solution for a variety of outdoor lighting needs. These fixtures are specifically designed to provide focused illumination on the wall and the area directly in front of it. They are ideal for accentuating vertical surfaces such as building facades, garden walls, and outdoor structures. Whether used to create ambiance or to enhance security with bright, focused light, these lights can serve multiple purposes in outdoor environments.

### Product Description

- Luminaire top cover & bottom frame made of pressure die-cast aluminium with extruded aluminium alloy (grade 6063) supporting arm.
- Translucent polycarbonate diffuser.
- Luminaire integrated with 12W LED.
- Aluminium base for easy installation onto the wall.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable
- Integral constant current power supply
- CRI (Ra) : 90
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24336-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K



### Product Benefits

- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation with low maintenance.
- The diffuser contributes to the creation of ambiance and to visual comfort by reducing glare.
- Sustainable LED technology offers durability and optimal light output with low power consumption.



### Area of Application

Residential, Building facade, Commercial centres, Passages, Pathways.

### Available Finish

Pure polyester powder coated  
RAL 9004 Black  
RAL 9007 Grey aluminium  
RAL 7016 Anthracite grey  
Graphite grey



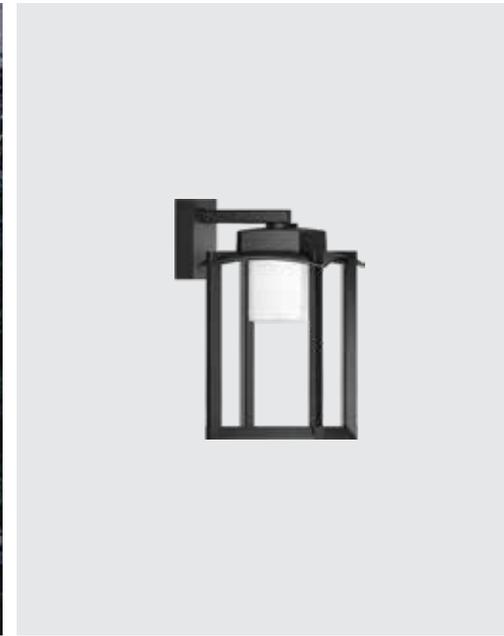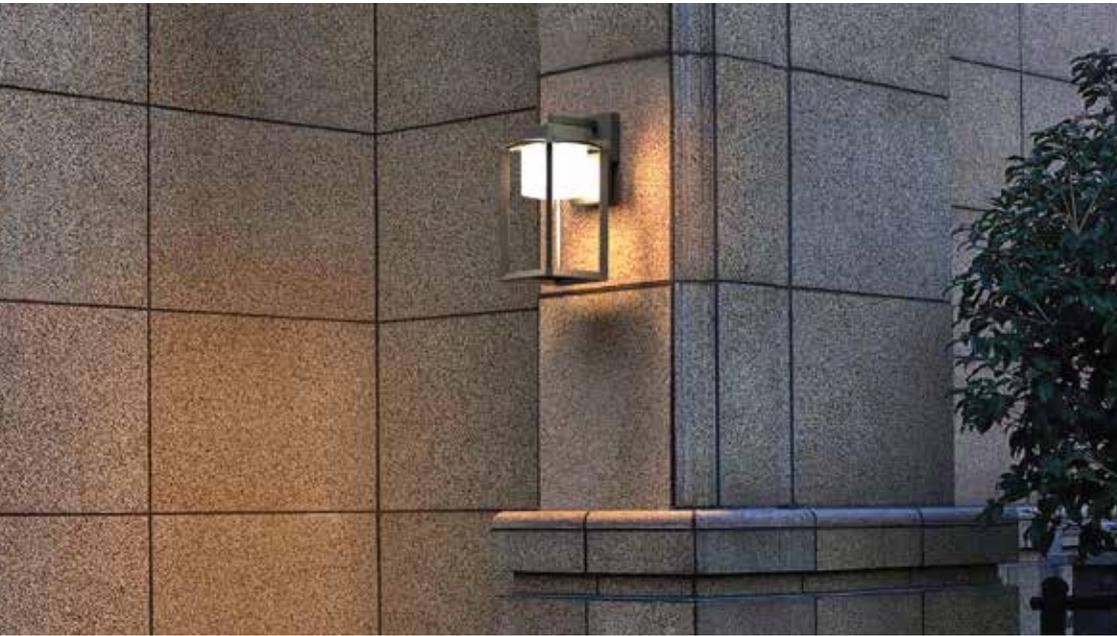

**Technical Specifications**

**General**

ID	: 24336
System Wattage	: 12W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

**Light Source**

Light Source	: CITIZEN
CRI (Ra)	: 90
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

**Physical**



Body	: Die-Cast Aluminium
Arm	: Extruded Aluminium
Diffuser	: Translucent Polycarbonate
Mounting	: Surface - Wall
Finish	: Powder coated
	RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

**Driver**

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

**Optical Performance**

Light Distribution	: Symmetrical
--------------------	---------------

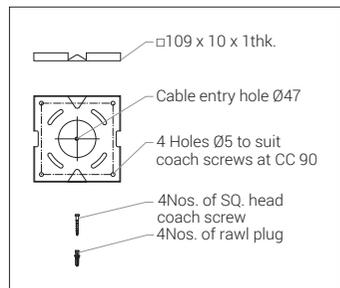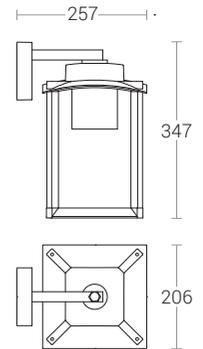

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)