

Technical Specifications

General

ID : 4443
 System Wattage : 96W
 Driver Integral : Constant Current
 Input Voltage : 230-240Vac
 Frequency : 50-60 Hz
 Operating Voltage : 100-300Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : NICHIA
 CRI (Ra) : >80
 LED Colour Temperature : 3000K / 4000K / 5700K

Driver


Power Supply : Integral
 Power Factor : >0.95
 THD : <10%
 Surge Protection : 6KV
 Efficiency : >88%

Physical

Body : Extruded Aluminum
 Diffuser : Polycarbonate Optical Lens
 Mounting : Suitable for mounting on
 Ø76 / Ø88.9 / □72 / □91
 Finish : Powder Coated
 Graphite Grey / Jet Black
 Anthracite Grey

Optical Performance

Light Distribution : Type III Medium

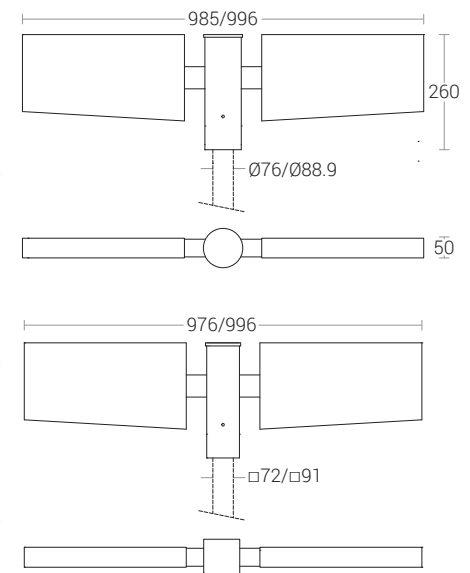

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in